



## 109822- EZ Clutch Adjustor Upgrade Kit

for 2022 Models

1. Locate the clutch cable adjuster on the right side of the frame down tube.



2. Remove the yellow plastic adjuster with a pair of side cutters. Cut the plastic from the bottom and from the top. Be careful not to cut the cable wire.



3. Now remove the spring by spreading open the end of the spring and twisting it off of the stock cable.



Tools & Supplies
Side Cutters
Small Straight Screwdriver
15 mm Wrench
EZ Clutch Adjustor Upgrade Kit


4. The photo below shows the parts that you are removing from the stock upper cable.



**WARNING:** The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, contact a dealer to perform the installation. Improper installation of this kit could result in death or serious injury.

Test brakes at low speed. If brakes are not operating properly, testing at high speeds can cause loss of control, which could result in death or serious injury.

5. Remove the O-ring from the adjuster. Align the slots on the two parts of the adjuster, then slide the wire into the slot.

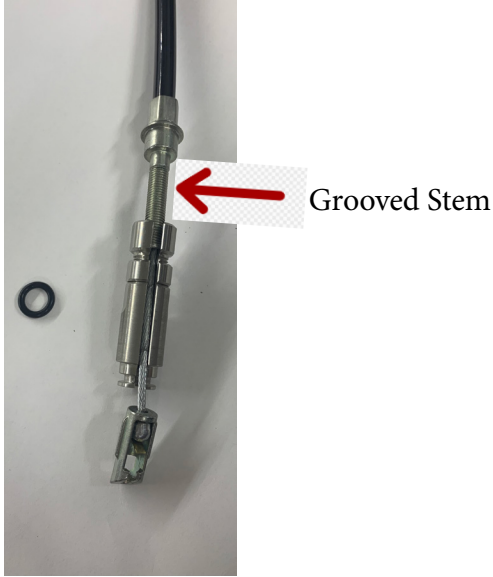

6. Now install the o-ring by sliding it over the bottom of the cable and back into the groove on the adjuster.



7. The new adjuster should look like the picture below when installed. After adjusting the clutch, tighten the locking nut.



8. In the image below: On the left is the stock cable (before), and on the right is the new adjuster installed (after).

BEFORE

AFTER

Factory H-D Upper Clutch Cable Adjustor

FBI EZ Clutch Adjustor Upgrade Kit

